

## Mini Powerful LED panel EX80

*EX80 is the winner of NRK (Norwegian national broadcaster) RFQ in 2019, due to its compact size, high light output, exact color, high-grade quality and DMX512 control.*

<b>Model</b>	EX80
<b>Tension</b>	110-230V 50-60Hz
<b>Beam angle</b>	60°
<b>CCT</b>	Bi-Color 3200K – 5600K
<b>CRI</b>	95+
<b>DMX512</b>	XLR 5pins
<b>LED Source</b>	DIP (soft)
<b>Power Drain</b>	80W
<b>TLCI</b>	95+
<b>Highlights</b>	Compact size, high light output, high-grade quality and Manual & DMX512 control.




### Specifications

- High CRI 95-98, TLCI >95
- 0-100% stepless dimming, Bi-color 3200K-5600K;
- LCD displays brightness, color temperature, and DMX address in real-time
- Beam angle 60°
- Brightness: 3062lux@1m, 694lux@2m
- Aluminum alloy frame, good heat dissipation
- Power option: AC adaptor, 14.8V battery, 2pcs of compatible battery DS-F960 via converting plate.
- Battery plate: V-mount battery plate (Anton Bauer Gold Mount plate optional)
- Dimension: 419 x 438 x 77 mm including yoke; panel size: 359 x 234 x 77 mm
- Weight: 2.57kg (without barndoor), 3.14kg (with barndoor)
- Certification: CE EMC and LVD certified, RoHs reports



TLCI Test

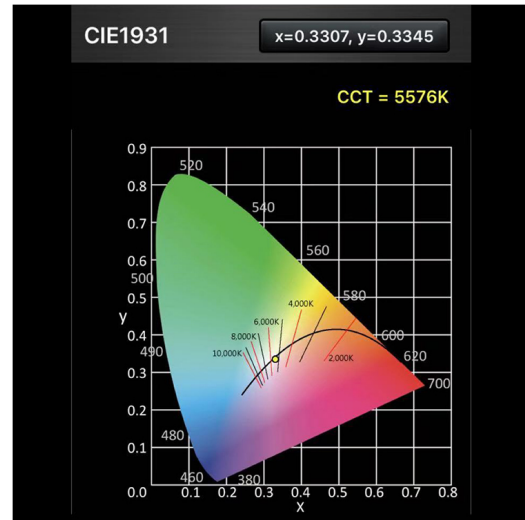

CIE 1931

### Photometric data

	1M	2M	3M
3200K	2562 lux / 238 fc	544 lux / 50.5 fc	304 lux / 28.3 fc
4400K	2822lux / 262 fc	606 lux / 56.3 fc	337 lux / 31.3 fc
5600K	3062lux / 290 fc	694 lux / 64.4 fc	387 lux / 35.9 fc

### what are included and package

- barndoors and yoke
- AC adapter with V-lock
- Power cable of 4 meters
- DMX XLR 5pins + cable of 5 meters
- Diffution filter
- Safety cable
- Manual
- Portable bag

**EURO LIGHT System - 24, rue des Moulins - 95110 SANNOIS - FRANCE**

Tel : +33 (0) 1.48.41.52.52 - Fax : +33 (0) 1.48.41.52.54

[contact@eurolight-system.com](mailto:contact@eurolight-system.com) - [www.eurolight-system.com](http://www.eurolight-system.com)