


Soft LED Panel EX200

Powerful soft LED panel EX200 is designed for big studios. The beam angle is flood 120°, but it can reach the brightness of 5600lux @1m. The wide CCT 2800K~6500K give more color choice. AC in and outputs to make more lights in parallel, for easier wiring. The fan-less design gives a silent shooting environment. Moreover, both CCT and brightness can be quick preset. The 11 lighting effects makes it competitive and available for more application.



Model	EX200
Power	200W
CRI	96+
TLCI	96+
CCT	Bi-Color 2800K~6500K
Dimming	0-100% step-less dimming, flicker-free
CCT quick setting	Touch Key for 3200K / 4500K / 5600K / 6500K
Brightness quick setting	Touch Key for 25% / 50% / 75% / 100%
DMX512	XLR 5pins
LED source	2400 pcs SMD (soft)
Beam angle	120°, wider light range
Light effects	11 special light effects
Power supply	AC/DC dual power supply modes Built-in AC adapter, AC outputs
Working voltage	AC 100-240V / DC 25.6-33.6V
Cooling system	All-aluminum frame, better heat dissipation
Dimension	1056 x 335 x 133 mm
Weight	10.5 kg
Stand	Safe and compact all-metal support of stand adapter

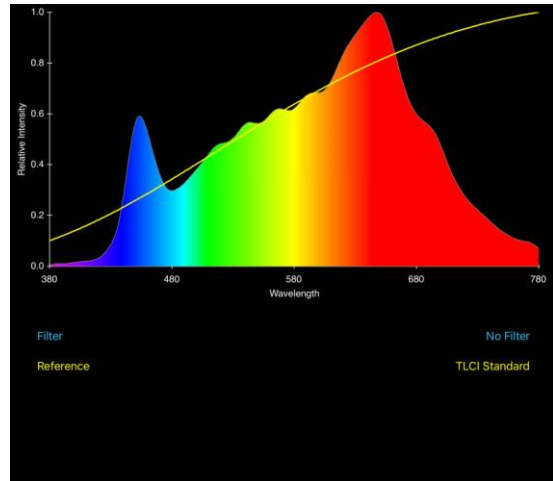

Photometric data

	1 meter / 3.28 feet	2 meter / 6.56 feet	3 meter / 9.84 feet
2800K	4453 lx / 413 fc	1405 lx / 131 fc	780 lx / 72 fc
3200K	5292 lx / 492 fc	1671 lx / 155 fc	890 lx / 83 fc
4400K	5421 lx / 504 fc	1740 lx / 162 fc	906 lx / 84 fc
5600K	5628 lx / 523 fc	1766 lx / 164 fc	907 lx / 84 fc
6500K	4978 lx / 463 fc	1615 lx / 150 fc	869 lx / 81 fc

What are included

1. LED Panel EX200 ×1
2. DMX cable ×1
3. Power cable ×1
4. Barn doors ×1 set
5. Safety cable ×1
6. Center stand or Yoke

Optional accessories

- Soft Box and Egg Crate;
- Honeycomb grid;
- Soft bag;
- Flight case;
- Battery and charger
- Parallel connection cable

EURO LIGHT System - 24, rue des Moulins - 95110 SANNOIS - FRANCE
Tel : +33 (0) 1.48.41.52.52 - Fax : +33 (0) 1.48.41.52.54

contact@eurolight-system.com - www.eurolight-system.com