



LED Fresnel EF100 Bi-Color

This 100W Fresnel is specially designed for small and middle studios. It is compact with fan-less design cooling system. There are wider CCT Bi-Color 3000K~6000K. The power in and power out makes more lights in parallel, for easier wiring.

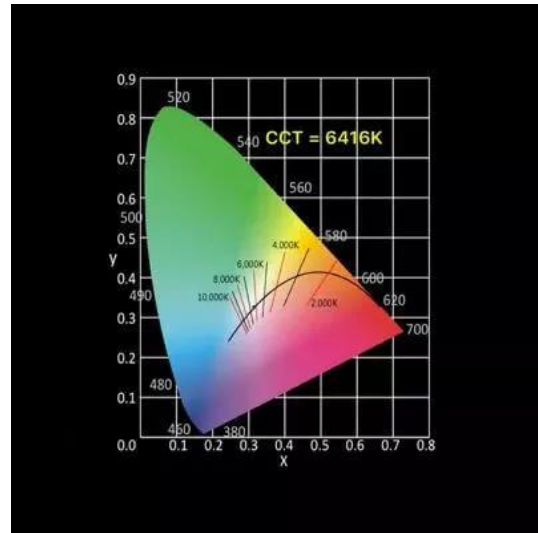

Model	EF100 Bi-Color
Power	100W
CRI	95+
TLCI	97+
CCT	Bi-Color 3000K~6000K
Beam angle	15° – 50°
Dimmer	Smooth 16-bit 0-100% linearly adjustable, 4 kinds of dimming curves available, flicker free
Dimming mode frequency	500Hz-25000Hz adjustable (HD shooting w/o flicker)
DMX512	XLR 5pins, mater and slave, auto running, sound mode, 2CH
Cooling System	Passive, fan-less design
Working voltage	AC 100-240V, 50-60Hz
Dimension	330 x 250 x 260 mm
Weight	6.2 kg (w/ barndoors)

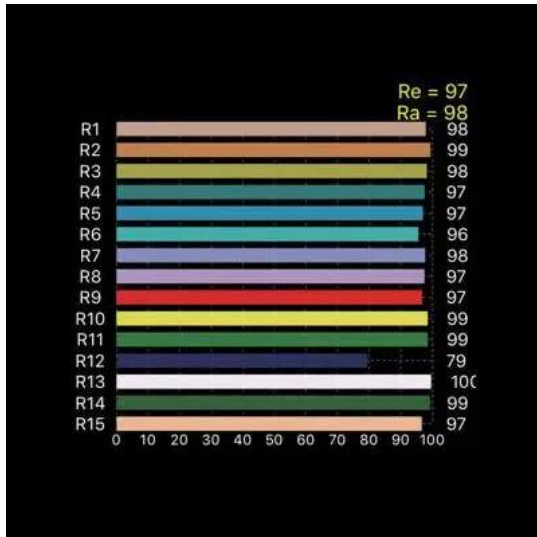

Photometric data

Spot(15°):

	2M	3M	5M	7M
3000K	7114lux / 661fc	3234lux / 301fc	1383lux / 129fc	687lux / 64fc
6000K	10287lux / 956fc	4660lux / 433fc	1974lux / 183fc	980lux / 91fc

Flood(50°):

	2M	3M	5M	7M
3000K	2406lux / 223fc	1123lux / 104fc	521lux / 49fc	252lux / 24fc
6000K	3537lux / 329fc	1605lux / 149fc	749lux / 70fc	358lux / 34fc

What are included

1. LED Fresnel
2. DMX cable
3. Power cable
4. Barn doors
5. Power output connector

EURO LIGHT System - 24, rue des Moulins - 95110 SANNOIS - FRANCE

Tel : +33 (0) 1.48.41.52.52 - Fax : +33 (0) 1.48.41.52.54

contact@eurolight-system.com - www.eurolight-system.com